


Natural Stone Coated Metal Roofing Tiles

Metal Roofing Tile Panel is made of Aluminium with coating of Zinc, which is Aluzinc. Water repellent igneous rock formed 500 years, is coated on to the base aluzinc panel. Due to this, the Aluzinc stone coated panels are resistant to water, sound and also UV repellent and thereby reducing the heat inside the room.

Due to the Zinc composition, this product is highly corrosion resistant. Also it is highly reflective to heat thereby giving climatic insulation for building in hot or cold conditions. Due to the shield created, overall Air conditioning cost will come down compared to GI and Aluminium sheets.

The total square meter weight of two metal tile panel is 5-6 Kg, making it one eighth lighter than the clay tiles. Overall length of the panel is equal to 7-8 clay or concrete tiles. Installation is made easy and fast due to this. This world class product, won't increase extra load on buildings as the product itself is light as well as the structure needed is lighter than clay or concrete tiles. It can be cut, bend to shape and installed easily.

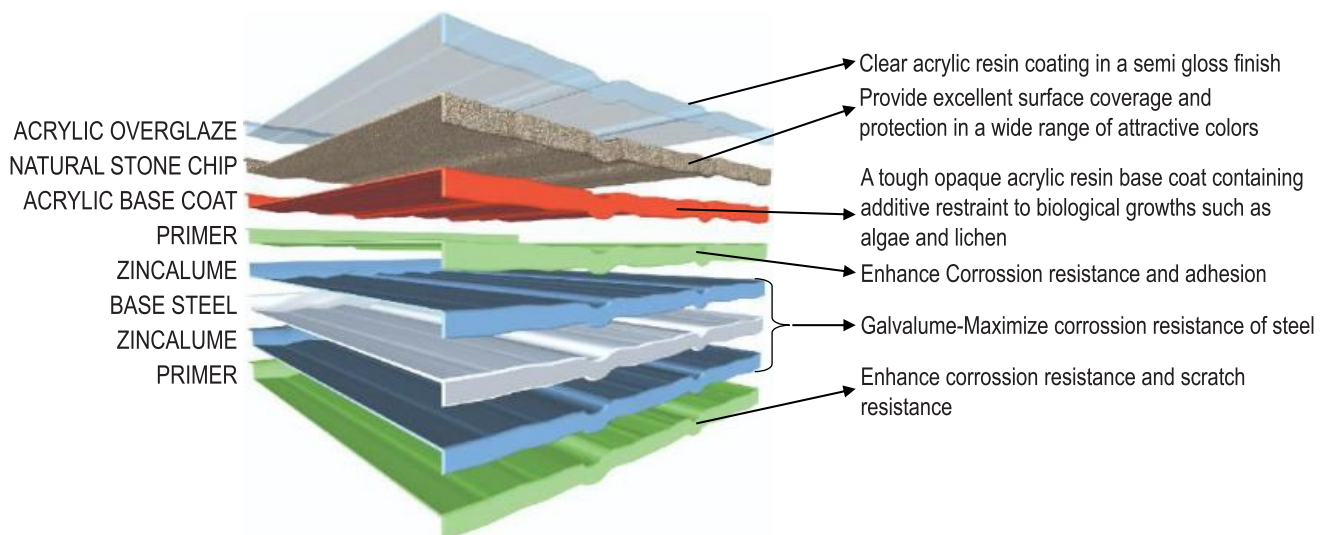

Natural Stone Coated Metal Roofing Tiles

Classic Tile



SPECIFICATION

| | |
|--|--------------------------|
| Tile Size (LXW) | : 1340 mm X 420 mm |
| Installed Exposure (LXW) | : 1290 mm X 370 mm |
| Min. Roof Pitch | : 12° |
| Weight Per Tile | : ±2.6 kg |
| Tiles Per Square (tiles/m ²) | : 2.08 pcs |
| Weight Per Square (weight/m ²) | : ±5.5 kg/m ² |
| Packing | : 500 pcs/pallet |

Shingle Tile



SPECIFICATION

| | |
|--|--------------------------|
| Tile Size (LXW) | : 1340 mm X 420 mm |
| Installed Exposure (LXW) | : 1290 mm X 370 mm |
| Min. Roof Pitch | : 12° |
| Weight Per Tile | : ±2.6 kg |
| Tiles Per Square (tiles/m ²) | : 2.08 pcs |
| Weight Per Square (weight/m ²) | : ±5.5 kg/m ² |
| Packing | : 500 pcs/pallet |



Authorised Representative